




接地螺母柱

JSOSG — 6440 — 8
 ↓ ↓ ↓
 型号 螺纹代码 长度码
 TYPE THREAD LENGTH CODE
 CODE

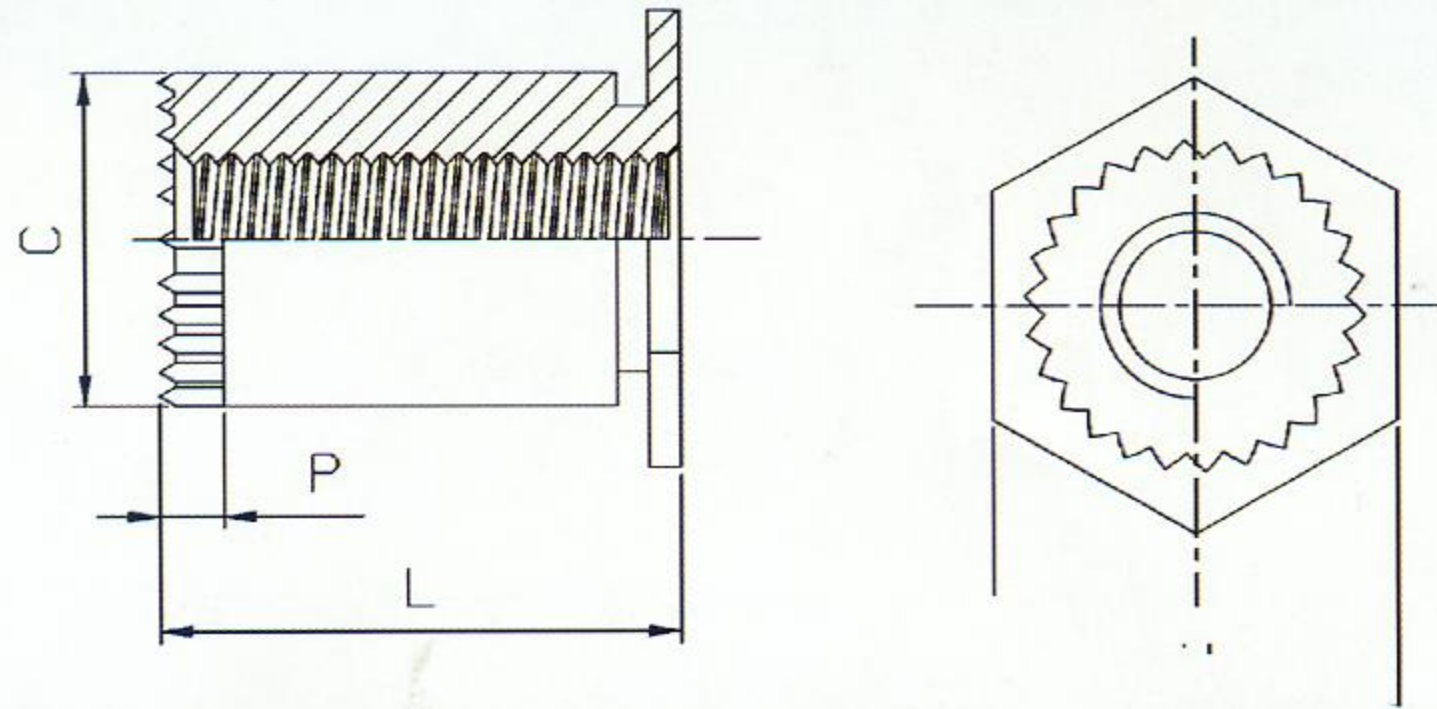

尺寸单位:英寸
All dimensions are in inches.

UNIFIED (英制)	螺纹尺寸 Thread Size	型号 Type		螺纹码 Thread Code	长度Length "L" +.010-.000 Length Code is in 32nds of an inch							最小板厚 Min. Sheet Thickness	安装孔 Hole Size In Sheet +.003 -.000	C +.000 -.005	H ±.005	P Nom	最小边距 Min. Dist Hole C/L To Edge	D Anvil Hole +.003 -.000
		不锈钢 Stainless Steel	铝 Aluminum		.125	.187	.250	.312	.375	.437	.500							
	.112-40 (#4-40)	JSOSG	JSOAG	6440	4	6	8	10	13	14	16	.040	.213	.212	.250	.030	.27	.216
	.138-32 (#6-32)	JSOSG	JSOAG	8632	4	6	8	10	12	14	16	.050	.281	.280	.312	.030	.31	.284

尺寸单位:MM
All dimensions are in millimeters.

METRIC (公制)	螺纹尺寸 X螺距 Thread Size x Pitch	型号 Type		螺纹码 Thread Code	长度Length "L" ±0.25 Length Code is in millimeters							最小板厚 Min. Sheet Thickness	安装孔 Hole Size In Sheet +0.08	C -0.13	H ±0.25	P Nom	最小边距 Min. Dist Hole C/L To Edge	D Anvil Hole +0.08
		不锈钢 Stainless Steel	铝 Aluminum		3	4	6	8	10	12								
	M3X0.5	JSOSG	JSOAG	3.5M3	3	4	6	8	10	12	1	5.4	5.39	6.4	0.76	6.8	5.5	

NA Not available

压
铆
系
列